
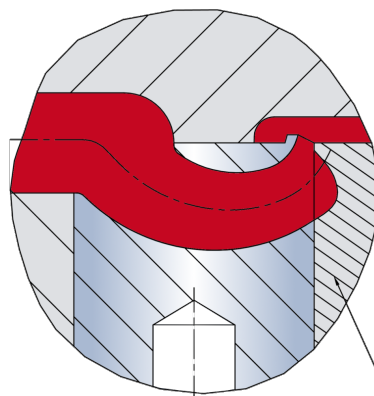


## Installation example: Thin-walled parts Standardflow

### Technical information

The calotte height can be reduced to a minimum of 0,4 mm. This is the height defined by the cutting edge. The front of the gate insert is sealed off by the cavity to the height of the parting line.

- to reduce pressure loss.
- to minimize shear.

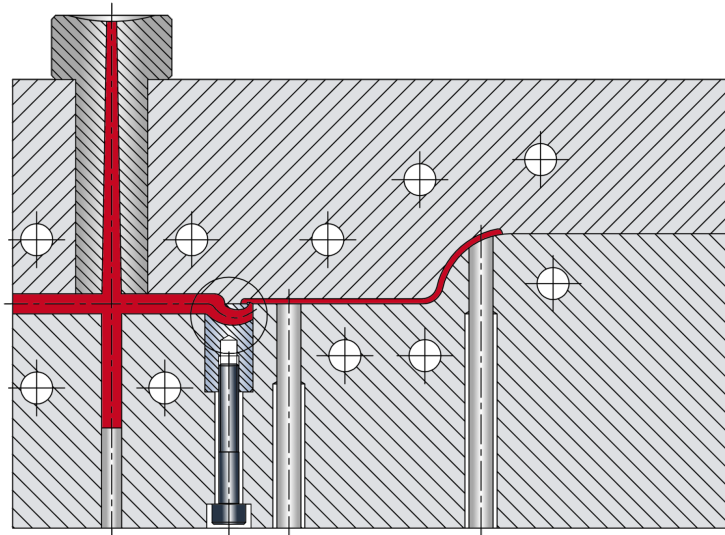

Optionally, provide a dead-end recess